


Endless Web Sling



Type 5 EN

Endless sling

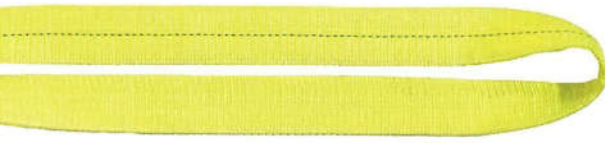

- Minimum breaking load is 5X WLL
- Polyester as standard, nylon available upon request
- Consider round slings in applications requiring 3-ply & 4-ply thick slings wider than 6"
- Extra protection is recommended in the eyes and on the body of the sling
- Custom slings available upon request

Ply	Part Number	Vertical Hitch	Choker Hitch	Vertical Basket	Web Width
		<i>Lbs</i>	<i>Lbs</i>	<i>Lbs</i>	<i>Inch</i>
One Ply	1901	3,200	2,560	6,400	1
	1902	6,200	4,960	12,400	2
	1903	9,400	7,520	18,800	3
	1904	12,400	9,920	24,800	4
	1906	18,600	14,880	37,200	6
	1908	21,200	16,960	42,400	8
	1910	25,500	20,400	51,000	10
	1912	31,800	25,440	63,600	12
Two Ply	2901	6,200	4,960	12,400	1
	2902	12,400	9,920	24,800	2
	2903	17,600	14,080	35,200	3
	2904	22,000	17,600	44,000	4
	2906	33,000	26,400	66,000	6
	2908	42,300	33,840	84,600	8
	2910	52,900	42,320	105,800	10
	2912	63,500	50,800	127,000	12
Three Ply	3901	9,600	7,680	19,200	1
	3902	17,700	14,160	35,400	2
	3903	25,600	20,480	51,200	3
	3904	34,600	27,680	69,200	4
	3906	48,900	39,120	97,800	6
	3908	61,400	49,120	122,800	8
	3910	72,000	57,600	144,000	10
	3912	80,600	64,480	161,200	12
Four Ply	4901	11,000	8,800	22,000	1
	4902	22,000	17,600	44,000	2
	4903	32,900	26,320	65,800	3
	4904	40,800	32,640	81,600	4
	4906	61,200	48,960	122,400	6
	4908	81,900	65,520	163,800	8
	4910	96,000	76,800	192,000	10
	4912	107,000	85,600	214,000	12

SYNTHETIC SLINGS