


Bulk Chain

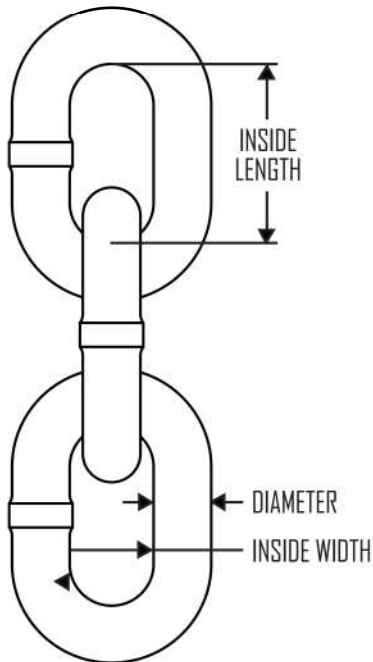

- Minimum breaking load is 4X WLL
- 100% proof tested
- Certification included with every drum
- Meets ASTM A973 & NACM standards
- If used in a choker hitch, WLL must be reduced by 20%
- Other chain grades & styles available on request

CHAIN SLINGS

Chain Grade	Chain Size <i>Inch</i>	Working Load Limit <i>Lbs</i>	Nominal Chain Dimensions			Per Foot		Per Drum	
			Diameter <i>Inch</i>	Inside L <i>Inch</i>	Inside W <i>Inch</i>	Weight <i>Lbs/Ft</i>	# Links	Length <i>Ft</i>	Weight <i>Lbs</i>
100	7/32	2,700	0.22	0.68	0.31	0.44	17.8	800	354
	9/32	4,300	0.28	0.88	0.40	0.73	13.6	500	365
	3/8	8,800	0.39	1.25	0.57	1.44	9.6	500	720
	1/2	15,000	0.51	1.56	0.73	2.46	7.7	300	738
	5/8	22,600	0.63	1.92	0.86	3.70	6.3	200	740
	3/4	35,300	0.79	2.4	1.07	5.77	5.0	100	577
80	1	47,700	1.00	3.07	1.49	6.41	3.9	100	941
	1-1/4	72,300	1.25	3.92	1.74	14.20	3.1	90	1,278