

Crosby® ROV Shackles



Fatigue Rated **Load Rated**



**G209R
ROV Shackle**

G209R ROV Shackles offer:

- Capacities 6-1/2 through 55 metric tonnes.
- Forged - Quenched and Tempered, with alloy pins.
- QUIC-CHECK® deformation and angle indicators forged on the bow.
- All ROV shackle bows, unless otherwise noted below, are galvanized, then painted fluorescent yellow.

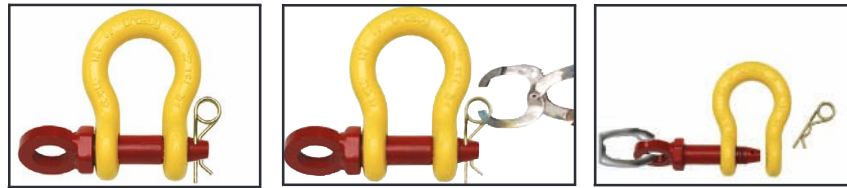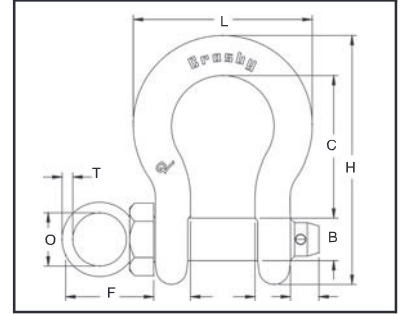

G209R ROV Shackle - Metric

G209R Stock No.	Working Load Limit (t) *	Weight Each (kg)	Dimensions - Body (mm)					Dimensions - Pin (mm)			
			A	B	C	H	L	O	P	T	S
1020872	6-1/2	1.79	36.6	25.4	84	148	102	50	58	10	17
1020902	8-1/2	2.28	42.9	28.7	95.5	167	119	50	61	10	18
1020932	9-1/2	3.75	46	31.8	108	190	131	70	83	12	18
1020952	12	5.31	51.5	35.1	119	210	146	70	84	12	23
1020972	13-1/2	7.18	57	38.1	133	233	162	75	91	15	23
1020992	17	9.43	60.5	41.4	146	254	175	75	93	15	24
1021102	25†	15.4	73	51	178	313	225	90	114	17.5	29
1021125	35†	23.7	82.5	57	197	348	253	106	132	20	30
1021158	55†	44.6	105	70	267	453	327	120	145	25	45

* Minimum Ultimate Load is 5 times the Working Load Limit. † Furnished with galvanized finish

G209R ROV Shackle - Inches

G209R Stock No.	Working Load Limit (t) *	Weight Each (lbs.)	Dimensions - Body (in.)					Dimensions - Pin (in.)			
			A	B	C	H	L	O	P	T	S
1020872	6-1/2	3.62	1.44	1.00	3.31	5.83	.50	1.18	2.28	.39	.65
1020902	8-1/2	5.03	1.69	1.13	3.75	6.56	.56	1.18	2.40	.39	.73
1020932	9-1/2	7.41	1.81	1.25	4.25	7.47	.63	2.28	3.27	.47	.75
1020952	12	9.50	2.03	1.38	4.69	8.25	.69	2.28	3.31	.47	.89
1020972	13-1/2	13.53	2.25	1.50	5.25	9.16	.75	2.36	3.58	.59	.91
1020992	17	17.20	2.38	1.63	5.75	10.00	.81	2.36	3.66	.59	1.18
1021102	25†	27.78	2.88	2.00	7.00	12.34	1.00	2.16	4.49	.69	1.14
1021125	35†	45.00	3.25	2.25	7.75	13.68	1.22	2.60	5.12	.79	1.18
1021158	55†	85.75	4.13	2.75	10.50	17.84	1.38	2.76	5.63	.98	1.50

* Minimum Ultimate Load is 5 times the Working Load Limit. † Furnished with galvanized finish

