


Material : Alloy steel  
 Safety factor : 4 times  
 Finish : Painted  
 Temperature range : -40°C up to +200°C, Polar Rated  
 Standard certification : Certificate of Conformity  
 3.1 material certificate EN 10204

Spare latches available on request

Standard hook with safety latch

ROV-hook

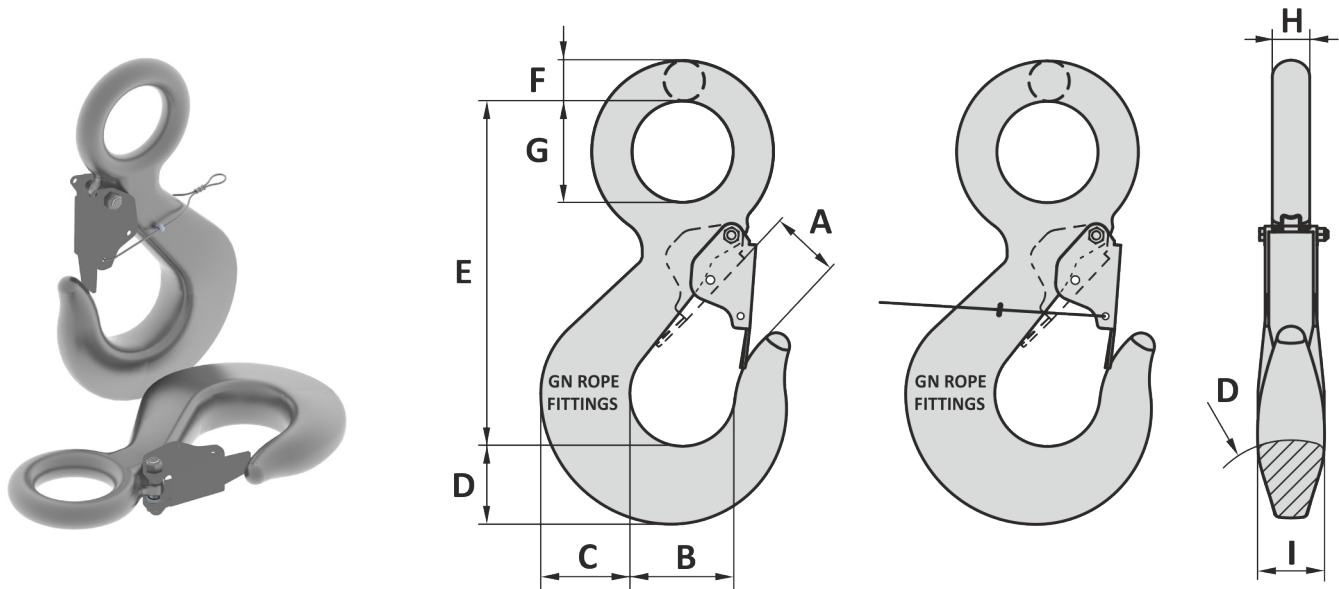

Art. No. standard	Art. No. ROV	WLL ton	MBL ton	A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	I mm	Weight kg
51000008	51000009	8	32	42	62	54	49	187	23	51	23	37	3.6
51000012	51000013	11.5	46	47	75	68	60	230	29	64	29	43	6.7
51000016	51000017	16	64	55	84	76	67	255	33	70	33	52	9.7
51000020	51000021	22	88	74	110	93	80	320	41	89	41	64	17
51000028	51000029	28	112	75	111	99	85	354	38	95	38	63	19
51000031	51000032	31	124	86	124	109	95	389	43	100	43	70	26
51000040	51000041	40	160	98	139	121	106	457	48	130	48	80	37
51000050	51000051	50	200	113	157	139	120	495	54	130	54	89	52
51000063	51000064	63	252	124	175	155	134	565	60	150	60	99	73
51000080	51000081	80	320	137	197	172	149	690	67	170	67	110	106
51000100	51000101	100	400	155	225	200	177	725	79	175	79	125	158

Tolerance: Forged parts ± 5%, machined parts ± 1 mm

Art. No. standard	Art. No. ROV	WLL ton	MBL ton	A inch	B inch	C inch	D inch	E inch	F inch	G inch	H inch	I inch	Weight lbs
51000008	51000009	8	32	1 21/32	2 7/16	2 1/8	1 15/16	7 3/8	29/32	2	29/32	1 7/16	8.6
51000012	51000013	11.5	46	1 27/32	2 15/16	2 11/16	2 3/8	9 1/16	1 1/8	2 1/2	1 1/8	1 11/16	16
51000016	51000017	16	64	2 5/32	3 3/16	3	2 5/8	10 1/32	1 5/16	2 3/4	1 5/16	2 1/16	22
51000020	51000021	22	88	2 29/32	4 5/16	3 19/32	3 5/32	12 19/32	1 5/8	3 1/2	1 5/8	2 1/2	42
51000028	51000029	28	112	2 29/32	4 13/32	3 25/32	3 1/4	13 15/16	1 13/32	3 3/4	1 13/32	2 15/32	37
51000031	51000032	32	128	3 11/32	4 15/16	4 3/16	3 5/8	15 5/16	1 9/16	3 15/16	1 9/16	2 3/4	51
51000040	51000041	40	160	3 25/32	5 1/2	4 21/32	4 1/16	18	1 25/32	5 1/8	1 25/32	3 3/32	75
51000050	51000051	50	200	4 3/8	6 3/32	5 5/16	4 9/16	19 1/2	2	5 3/8	2	3 1/2	108
51000063	51000064	63	252	4 27/32	6 15/16	5 15/16	5 1/8	22 1/4	2 3/16	5 29/32	2 3/16	3 29/32	139
51000080	51000081	80	320	5 11/32	7 13/16	6 5/8	5 23/32	27 3/32	2 15/32	6 11/16	2 15/32	4 5/16	218
51000100	51000101	100	400	6 1/32	8 3/8	7 11/16	6 25/32	28 3/16	2 29/32	6 7/8	2 29/32	4 15/16	353

Tolerance: Forged parts ± 5%, machined parts ± 1/32 inch

03-08-2021