

GENERAL

Material : Alloy steel
 Safety factor : 4 times
 Standards : DIN 7540
 Finish : Painted
 Temperature range : -40°F up to +392°F, Polar Rated
 Standard certification : Certificate of Conformity
 3.1 material certificate EN 10204

SHACKLES

Spare latches available on request

THIMBLES

SOCKETS


LINKS

SWIVELS

HOOKS



MOORING

OTHERS

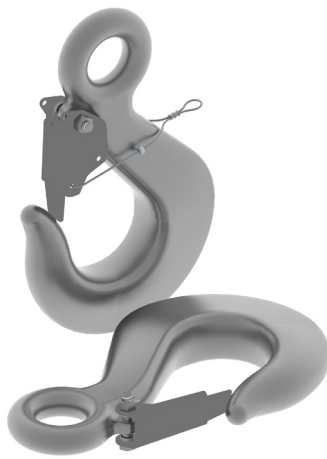

Standard hook with safety latch

ROV-hook

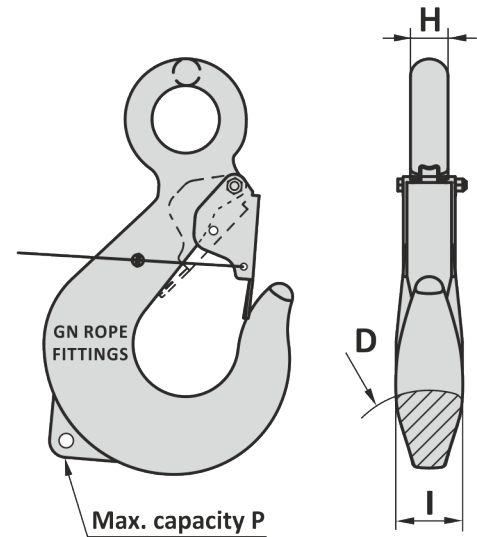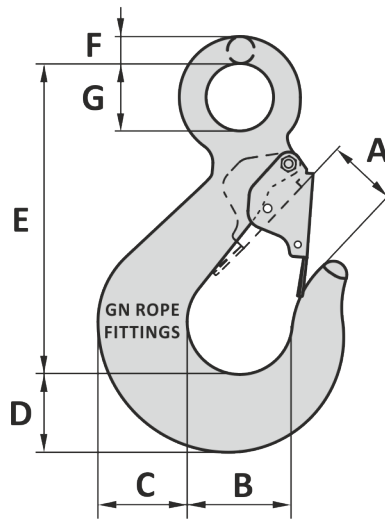

* Standard hooks from WLL 250 ton will supplied with a handling padeye with maximum capacity P, hooks WLL 100 ≤ 200 ton on request

Art. No. standard	Art. No. ROV	WLL ton	MBL ton	A inch	B inch	C inch	D inch	E inch	F inch	G inch	H inch	I inch	P ton	Weight lbs
45001009	45001010	8	32	1 1/16	2 7/16	2 1/8	1 13/16	6 27/32	2 5/32	1 1/4	2 5/32	1 3/8		6.4
45001013	45001014	12.5	50	2 1/16	3 3/8	2 23/32	2 3/8	8 5/8	1 1/32	1 9/16	1 1/32	1 25/32		13
45001017	45001018	16	64	2 5/16	3 15/32	2 15/16	2 1/2	9 11/16	1 3/32	1 13/16	1 3/32	1 31/32		18
45001021	45001022	20	80	2 1/2	3 3/8	3 3/16	3	10 29/32	1 11/32	2	1 11/32	2 3/16		26
45001029	45001030	28	112	2 29/32	4 3/8	3 29/32	3 1/32	12 3/16	1 1/2	2 5/16	1 1/2	2 15/32		37
45001032	45001033	31	124	3 3/32	4 15/16	4 9/32	3 1/16	13 3/4	1 1/16	2 9/16	1 1/16	2 3/4		55
45001041	45001042	40	160	3 29/32	5 15/32	4 3/4	4 3/16	15 9/32	1 29/32	2 27/32	1 27/32	3 3/32		75
45001051	45001051	50	200	4 3/16	6 3/16	5 15/32	4 23/32	17 13/32	2 1/2	3 3/16	2 1/8	3 1/2		108
45001064	45001065	63	252	4 3/4	6 7/8	6 3/32	5 9/32	19 7/16	2 3/8	3 9/16	2 3/8	3 29/32		148
45001081	45001082	80	320	5 5/16	7 3/4	6 25/32	5 7/8	24	2 5/8	4	2 5/8	4 3/16		218
45001101	45001102	100	400	6 1/16	8 7/8	7 7/8	6 31/32	25 19/32	3 1/8	4 9/16	3 3/8	4 15/16		326
51000150	51000151	150	600	7 1/8	9 27/32	9 1/16	8	30 1/8	3 19/32	5 1/8	3 19/32	6 1/16		542
51000200	51000201	200	800	8 3/16	10 13/16	10 7/16	9 7/16	33 15/32	4 7/32	5 29/32	4 7/32	7 3/32		820
51000250	51000251	250	1000	9 3/16	12 3/16	11 23/32	10 13/16	36 1/32	4 31/32	6 11/16	4 31/32	7 7/8	9.5	1171
51000300	51000301	300	1200	10 3/8	13 25/32	13 3/4	12 15/32	41 19/32	5 25/32	7 15/32	5 25/32	8 23/32	12	1717
51000400	51000401	400	1600	11 15/16	15 3/4	15 9/32	13 7/8	47 1/16	6 27/32	8 3/4	6 27/32	9 7/16	17	2522
51000500	51000501	500	2000	14 1/16	17 23/32	16 1/8	15 11/32	53 3/16	7 7/8	8 15/32	7 7/8	12 19/32	17	4057

Tolerance: Forged parts ± 5%, machined parts ± 1/32 inch

03-08-2021

Material : Alloy steel
 Safety factor : 4 times
 Standards : DIN 7540
 Finish : Painted
 Temperature range : -40°C up to +200°C, Polar Rated
 Standard certification : Certificate of Conformity
 3.1 material certificate EN 10204

Spare latches available on request

GENERAL

SHACKLES

THIMBLES

SOCKETS

LINKS

SWIVELS


HOOKS

MOORING

OTHERS

Standard hook with safety latch

ROV-hook

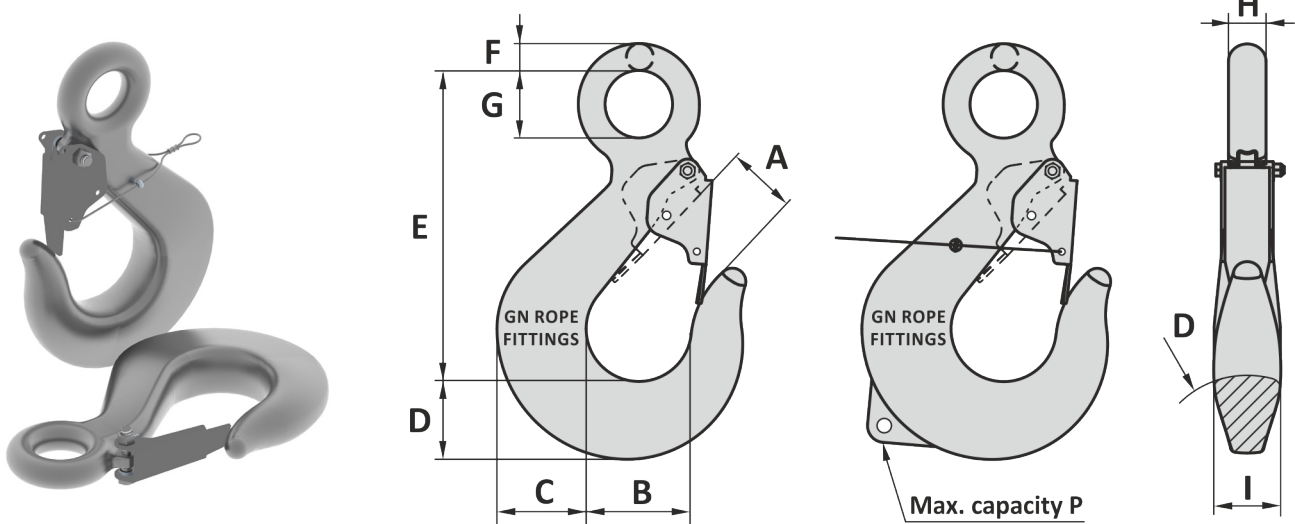

* Standard hooks from WLL 250 ton will supplied with a handling padeye with maximum capacity P, hooks WLL 100 ≤ 200 ton on request

Art. No. standard	Art. No. ROV	WLL ton	MBL ton	A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	I mm	P ton	Weight kg
45001009	45001010	8	32	40	62	54	46	174	20	32	20	35		2.9
45001013	45001014	12.5	50	52	79	69	60	219	26	40	26	45		6.1
45001017	45001018	16	64	59	88	75	64	246	28	46	28	50		8.1
45001021	45001022	20	80	64	98	87	76	277	34	51	34	56		12
45001029	45001030	28	112	74	111	99	85	313	38	59	38	63		17
45001032	45001033	31	124	82	125	109	94	349	43	65	43	70		25
45001041	45001042	40	160	99	139	121	106	388	47	72	47	80		34
45001051	45001051	50	200	110	157	139	120	442	54	84	54	89		49
45001064	45001065	63	252	121	175	155	134	494	60	90	60	99		67
45001081	45001082	80	320	132	197	172	149	610	67	102	67	110		99
45001101	45001102	100	400	154	225	200	177	650	79	116	79	125		148
51000150	51000151	150	600	181	250	230	203	765	91	130	91	160		246
51000200	51000201	200	800	208	275	265	240	850	107	150	107	180		372
51000250	51000251	250	1000	233	310	296	275	928	126	170	126	200	9.5	531
51000300	51000301	300	1200	264	350	337	317	1052	147	190	147	220	12	779
51000400	51000401	400	1600	303	400	388	352	1195	174	210	174	240	17	1144
51000500	51000501	500	2000	370	450	410	390	1360	200	215	200	320	17	1840

Tolerance: Forged parts ± 5%, machined parts ± 1 mm

03-08-2021