



3-Leg Chain Sling


TOG | Master link
Grab hooks

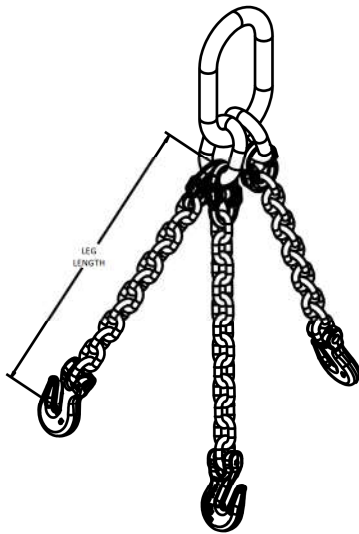


ATOG | Master link
Leg Shorteners
Grab hooks

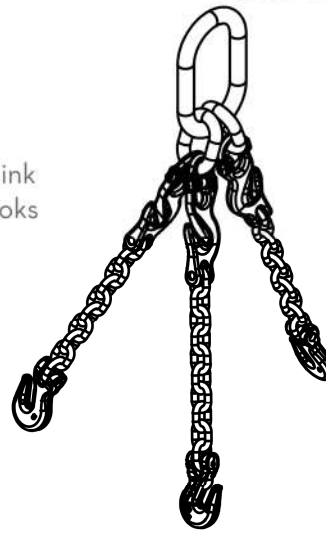

TOS | Master link
Sling hooks

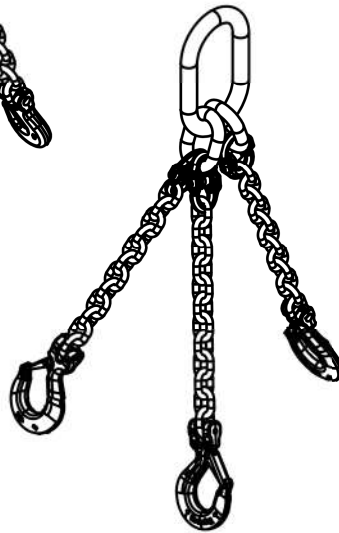

ATOS | Master link
Leg Shorteners
Sling hooks

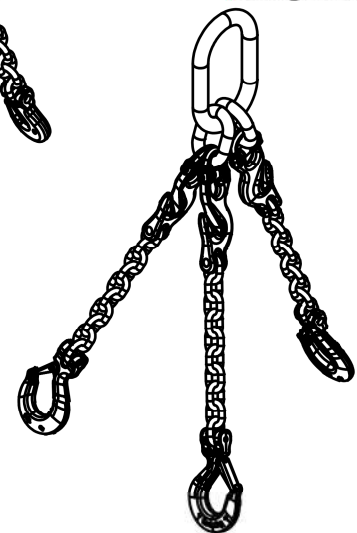

- Minimum breaking load is 4X WLL
- If used in a choker hitch, WLL must be reduced by 20%
- WLL based on evenly distributed leg load
- Chain shorteners retain full WLL when used
- 9/32 to 5/8 slings use in-line shorteners, other sizes use separate shortener hook legs
- Custom slings available upon request
- Self-locking hooks available upon request

Chain Grade	Chain Size	60° WLL	45° WLL	30° WLL
	<i>Inch</i>	<i>lbs</i>	<i>lbs</i>	<i>lbs</i>
100	7/32	7,000	5,700	4,000
	9/32	11,200	9,100	6,400
	3/8	22,900	18,700	13,200
	1/2	39,000	31,800	22,500
	5/8	58,700	47,900	33,900
	3/4	91,700	74,900	53,000
80	1	123,900	101,200	71,500
	1-1/4	187,800	153,400	108,400